

LAMITECH

GLOBAL

GLOSS THAT GLEAMS
WITH GRACE



USA
TECHNOLOGY

BUILT FOR
GLOBAL
STANDARDS

6H ANTI SCRATCH
HARDNESS

ACRYLIC
LAMINATES

15mm 100% Acrylic
ANTI YELLOW

Brilliance
Beyond
Limits.

ACRYLIC
LAMINATES



Reflections
of elegance.

LAMITECH
GLOBAL

About Us

At Lamitech Global, we believe that true design excellence lies in the perfect harmony of beauty, performance, and innovation. Our laminates are thoughtfully crafted using state-of-the-art technology to deliver best-in-class aesthetics that go beyond mere visual appeal. Every sheet reflects precision in detailing, refinement in texture, and brilliance in finish — creating surfaces that exude sophistication and elevate the overall ambiance of any environment.

Designed with an uncompromising commitment to quality, these laminates promise exceptional durability and long-lasting surface finesse. Their fine craftsmanship ensures that they not only look stunning but also withstand the test of time, maintaining their charm and elegance even after years of use. Whether used in residential interiors or commercial spaces, Lamitech Global laminates effortlessly complement diverse design themes — from modern minimalism to timeless luxury.

Each design, each shade, and each texture is curated to enhance the mood of a space, adding warmth, depth, and personality. With Lamitech Global, aesthetics are more than just surface beauty — they are a reflection of superior technology, meticulous craftsmanship, and an unwavering dedication to creating environments that inspire creativity, comfort, and class.



HIGH GLOSS
FINISH



EASY TO
CLEAN



STAIN
RESISTANCE



SCRATCH
RESISTANCE



ANTI BACTERIAL
SURFACE




100 % PURE
ACRYLIC

Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-1011

6H ANTI SCRATCH
HARDNESS

SOLID
Surface



APPLICATION AREAS







ACRYLIC
LAMINATES

LAMITECH
GLOBAL

Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IO43

APPLICATION AREAS



SOLID
Surface

6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-IO45

6H ANTI SCRATCH
HARDNESS

SOLID
Surface



APPLICATION AREAS








APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IO47

SOLID
Surface


6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-1016

6H ANTI SCRATCH
HARDNESS

SOLID
Surface



APPLICATION AREAS








APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IOI5

SOLID
Surface


6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM


THICKNESS :
1.5 MM



MD-1017

6H ANTI SCRATCH
HARDNESS

SOLID
Surface

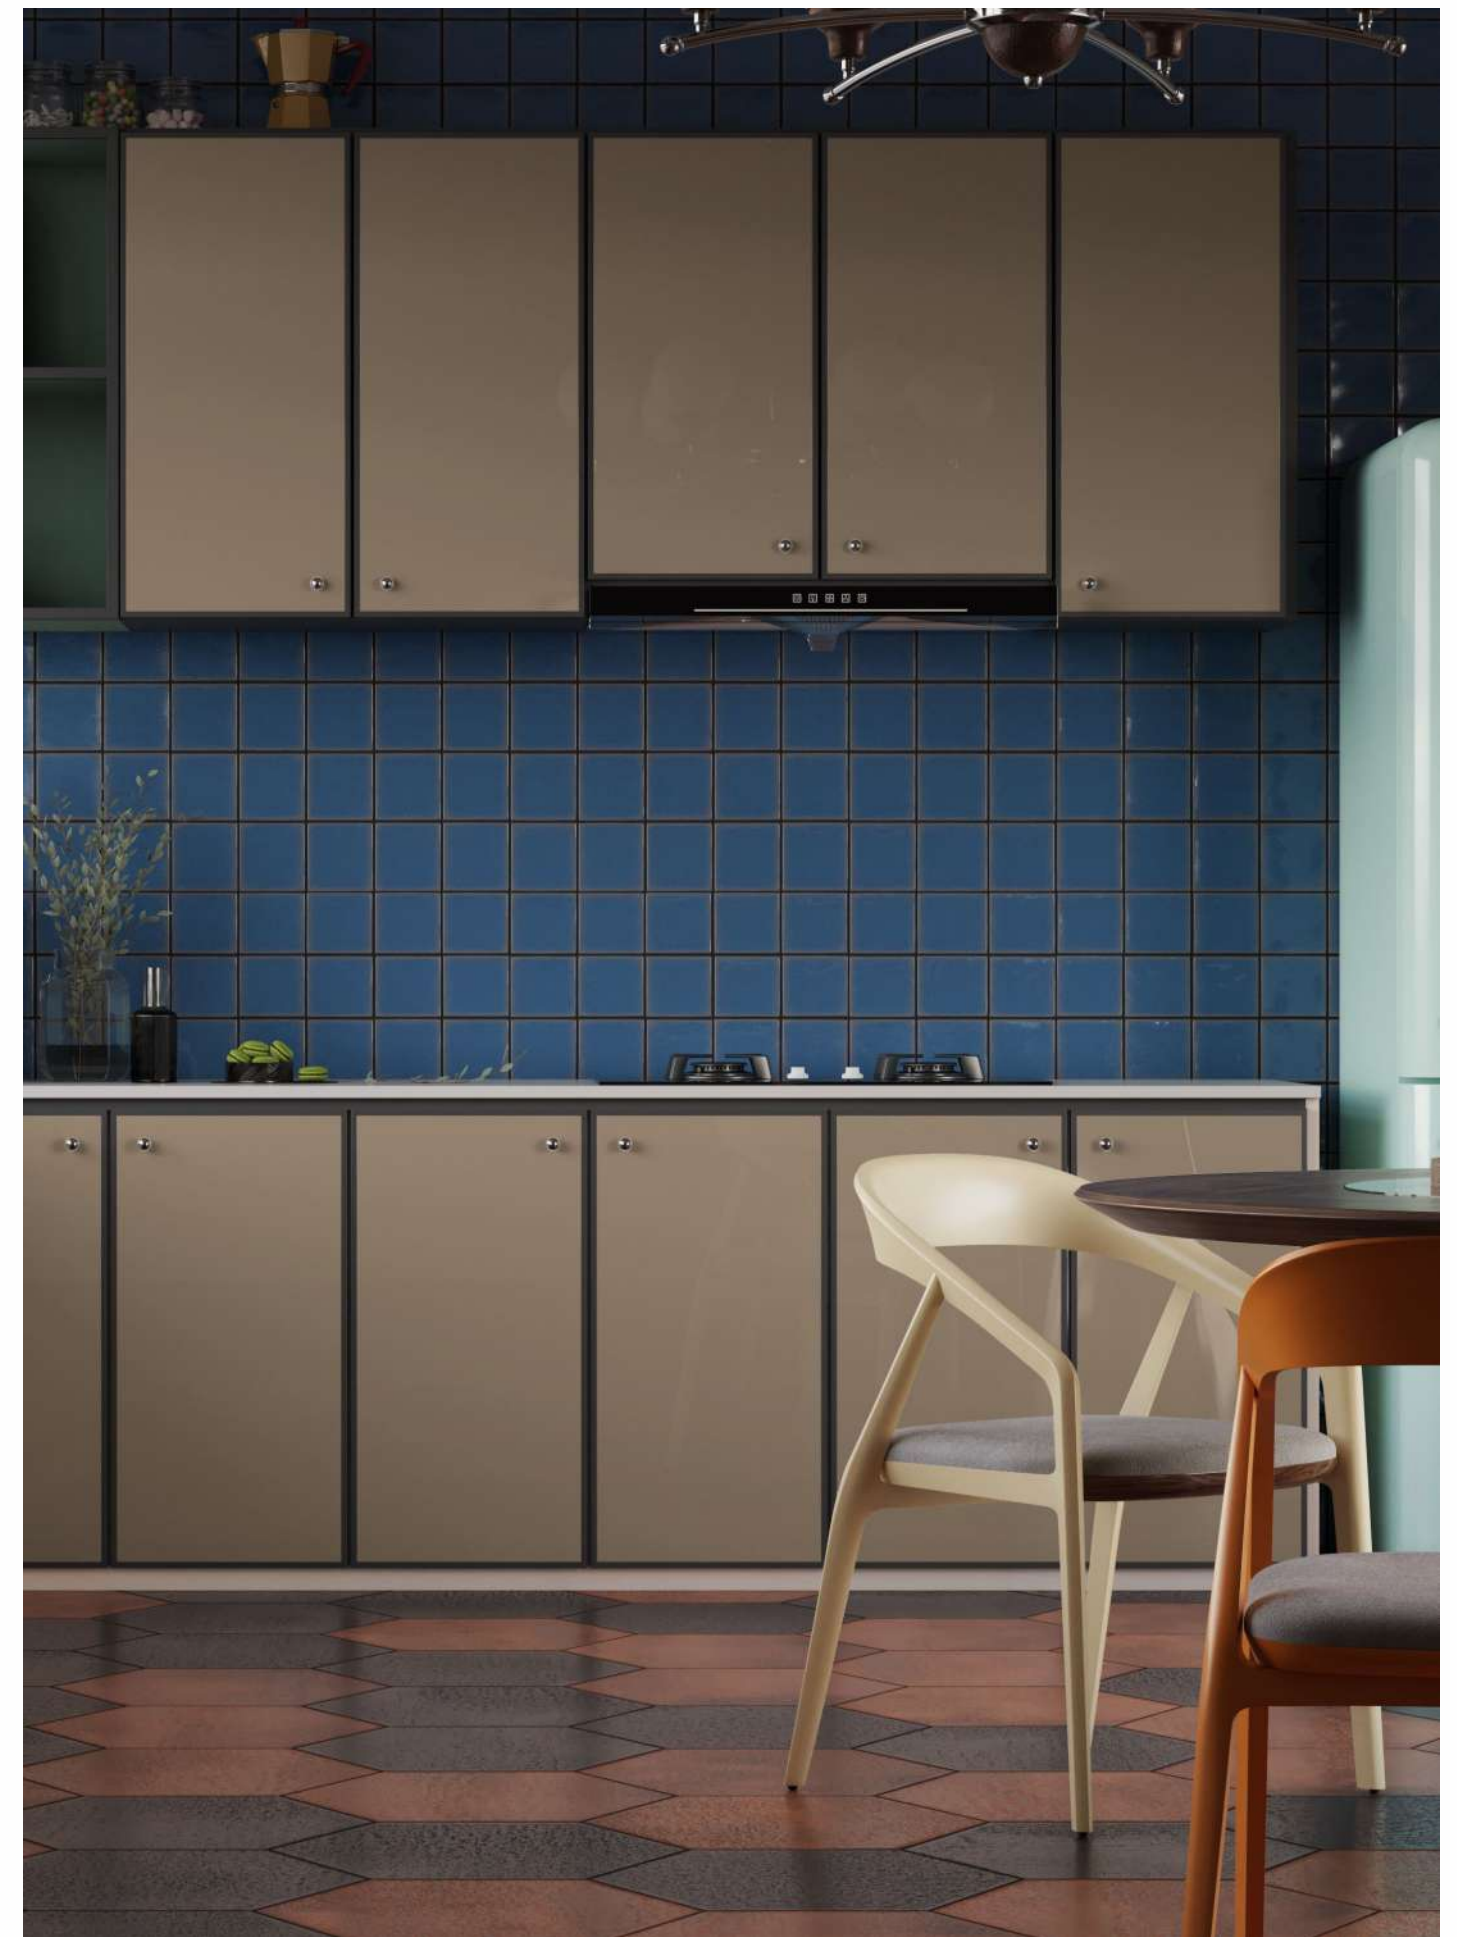

APPLICATION AREAS







APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IO23

SOLID
Surface


6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-IO25

6H ANTI SCRATCH
HARDNESS

SOLID
Surface



APPLICATION AREAS








ACRYLIC
LAMINATES

LAMITECH
GLOBAL



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IO26

APPLICATION AREAS



SOLID
Surface


6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-1014

6H ANTI SCRATCH
HARDNESS



APPLICATION AREAS







APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IOI8

SOLID
Surface

6H ANTI SCRATCH
HARDNESS

AM

10 08

BRINGING THE HOUSE HOME
BRINGING THE HOUSE HOME
FURNITURE DESIGN
BRINGING THE HOUSE HOME
BRINGING THE HOUSE HOME
MARCEL BREUER

Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-1019

6H ANTI SCRATCH
HARDNESS

SOLID
Surface



APPLICATION AREAS







APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IO20

SOLID
Surface


6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-IO44

6H ANTI SCRATCH
HARDNESS

SOLID
Surface



APPLICATION AREAS







APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL



MD-IO24

Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

SOLID
Surface

6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-IO29

6H ANTI SCRATCH
HARDNESS

SOLID
Surface



APPLICATION AREAS






Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM


THICKNESS :
1.5 MM



MD-IO31

6H ANTI SCRATCH
HARDNESS

SOLID
Surface

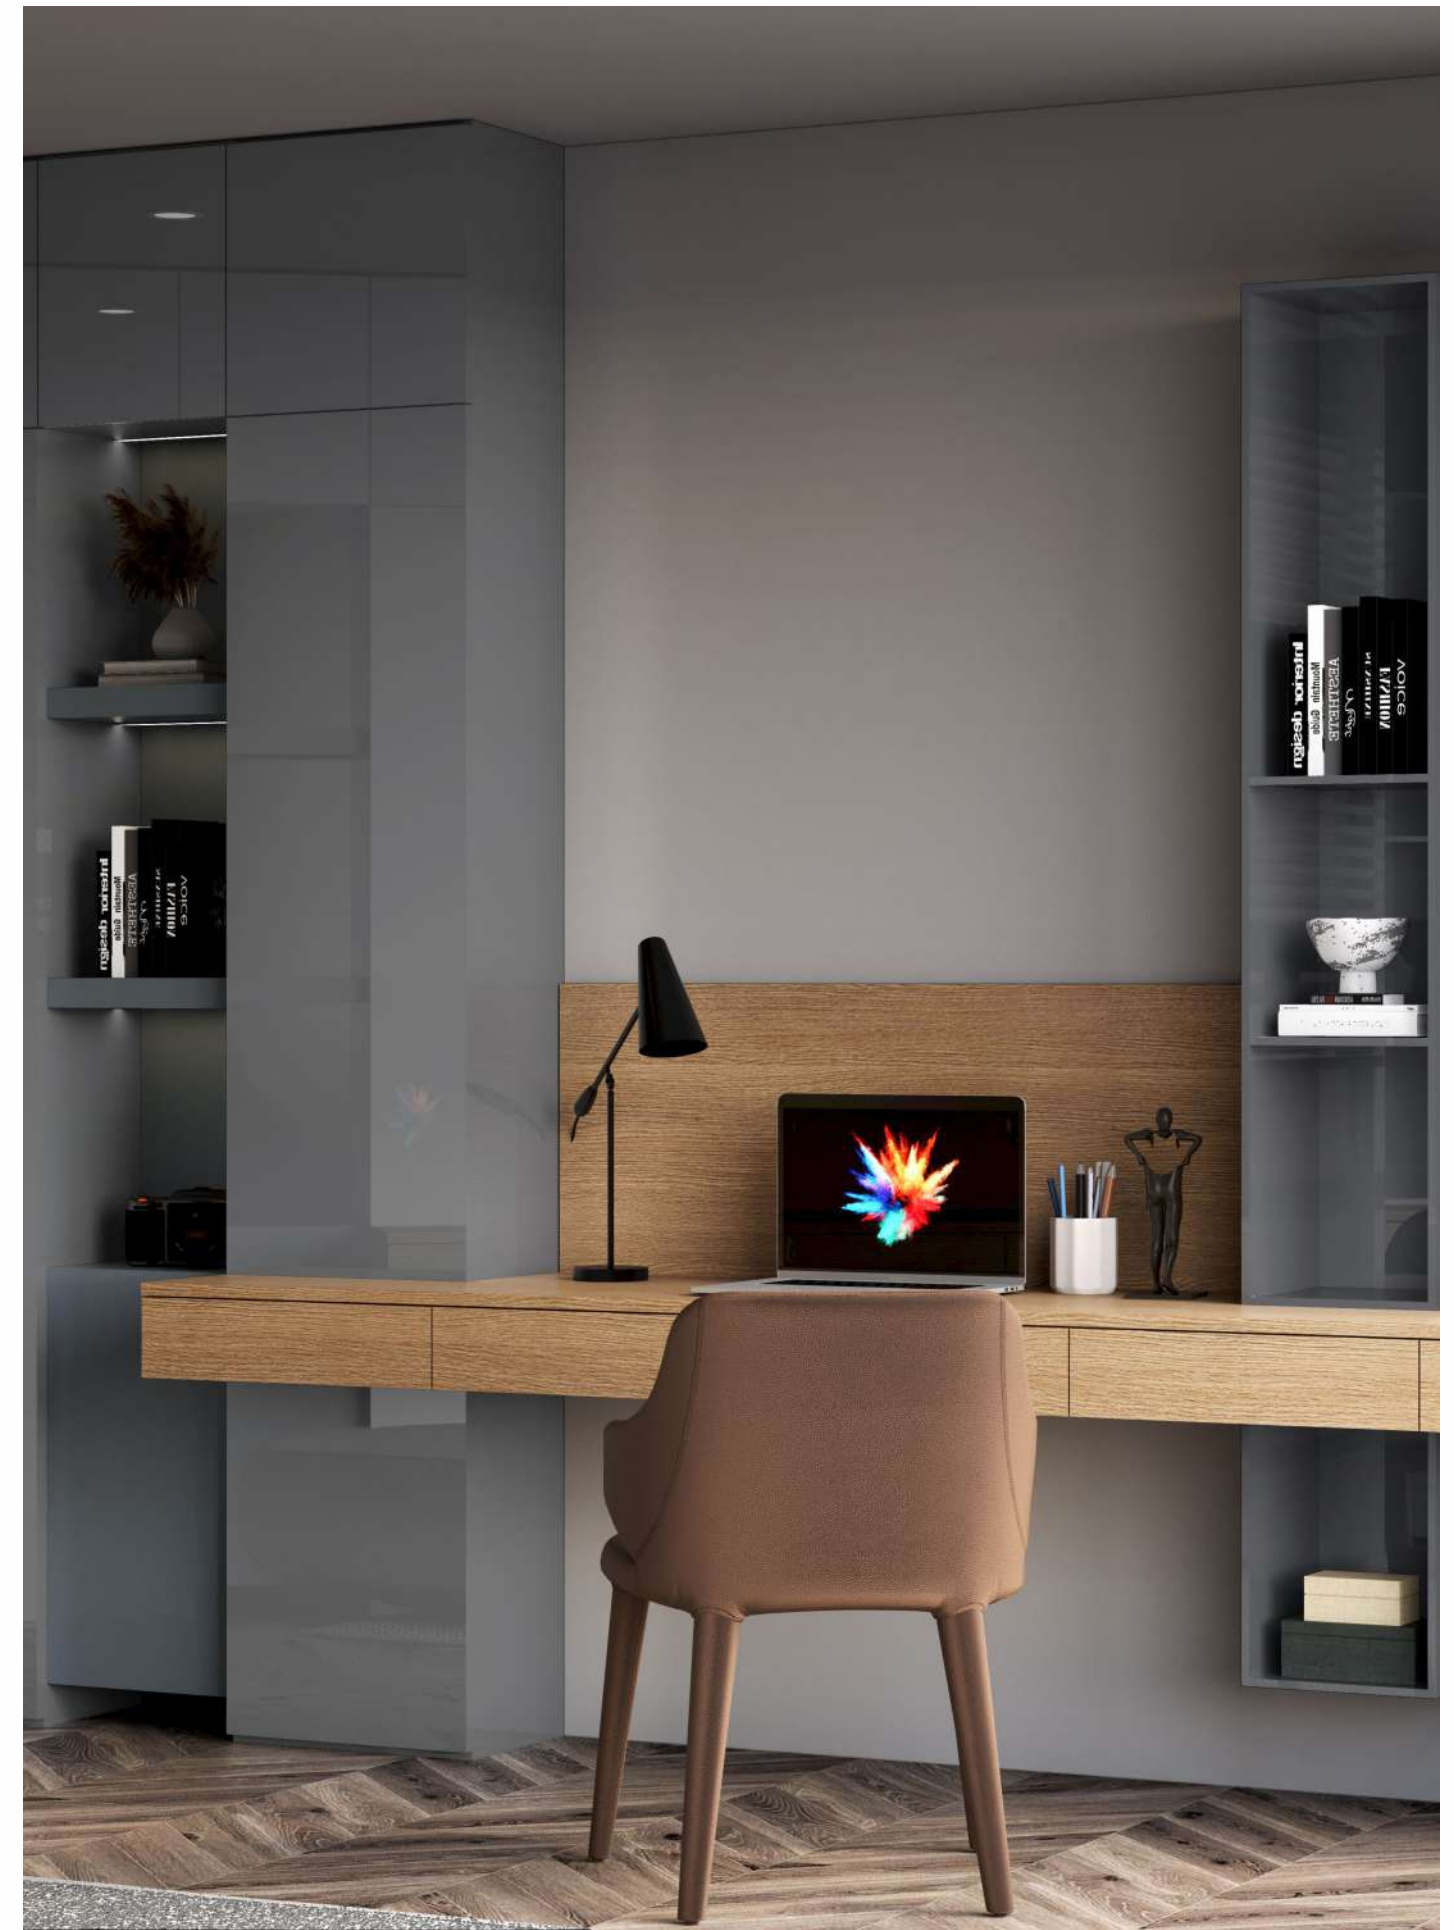

APPLICATION AREAS








APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IO48

SOLID
Surface


6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-IO46

6H ANTI SCRATCH
HARDNESS

SOLID
Surface



APPLICATION AREAS







APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IO21

SOLID
Surface

6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-IO22

6H ANTI SCRATCH
HARDNESS

SOLID
Surface



APPLICATION AREAS








APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IO28

SOLID
Surface

6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-IO35

6H ANTI SCRATCH
HARDNESS

SOLID
Surface



APPLICATION AREAS








APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IO32

SOLID
Surface


6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-IO30

6H ANTI SCRATCH
HARDNESS

SOLID
Surface



APPLICATION AREAS








APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IO36

MIRROR
Surface

6H ANTI SCRATCH
HARDNESS





MD-IO37



MD-IO38



MD-IO39

Brilliance
Beyond
Limits.

MIRROR
FINISH

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

6H ANTI SCRATCH
HARDNESS



APPLICATION AREAS






APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IOI3

METALIC
Series


6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-IO33








APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IO34

METALIC
Series


6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-IO49

6H ANTI SCRATCH
HARDNESS

SPARKLE
Series



APPLICATION AREAS








APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL

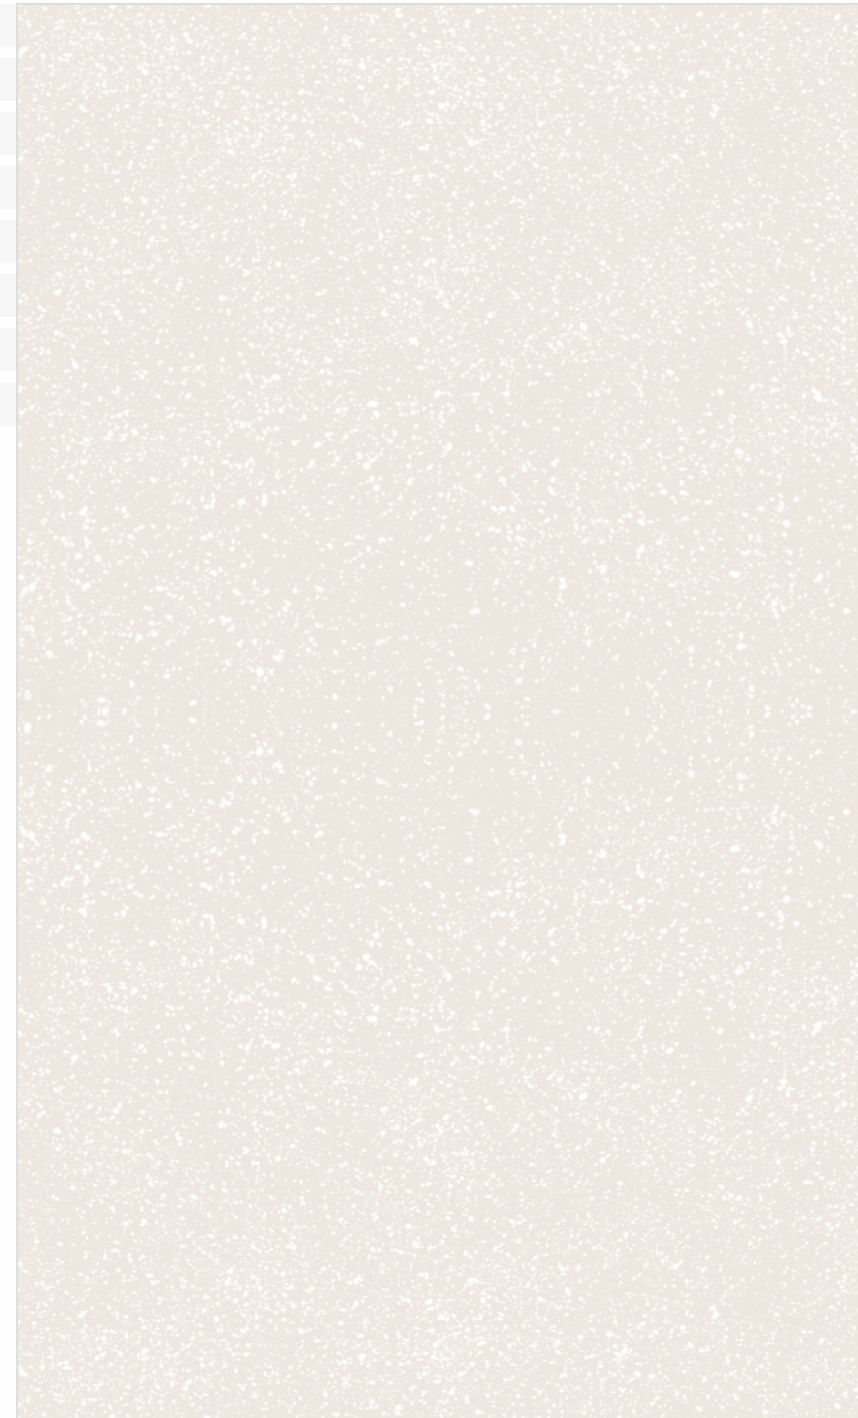

MD-IO50

Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

SPARKLE
Series


6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

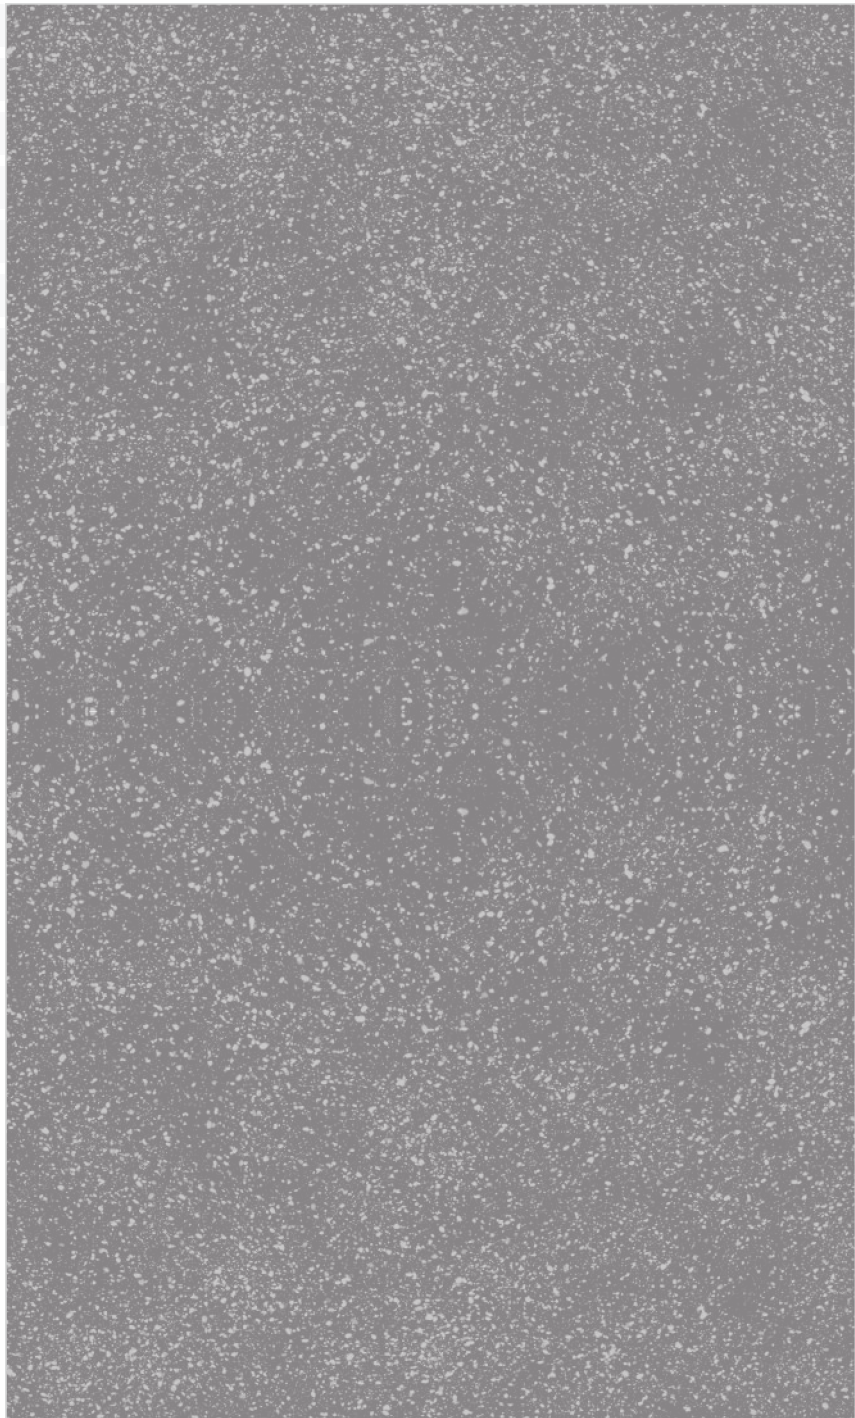

MD-IO51

6H ANTI SCRATCH
HARDNESS


SPARKLE
Series



APPLICATION AREAS





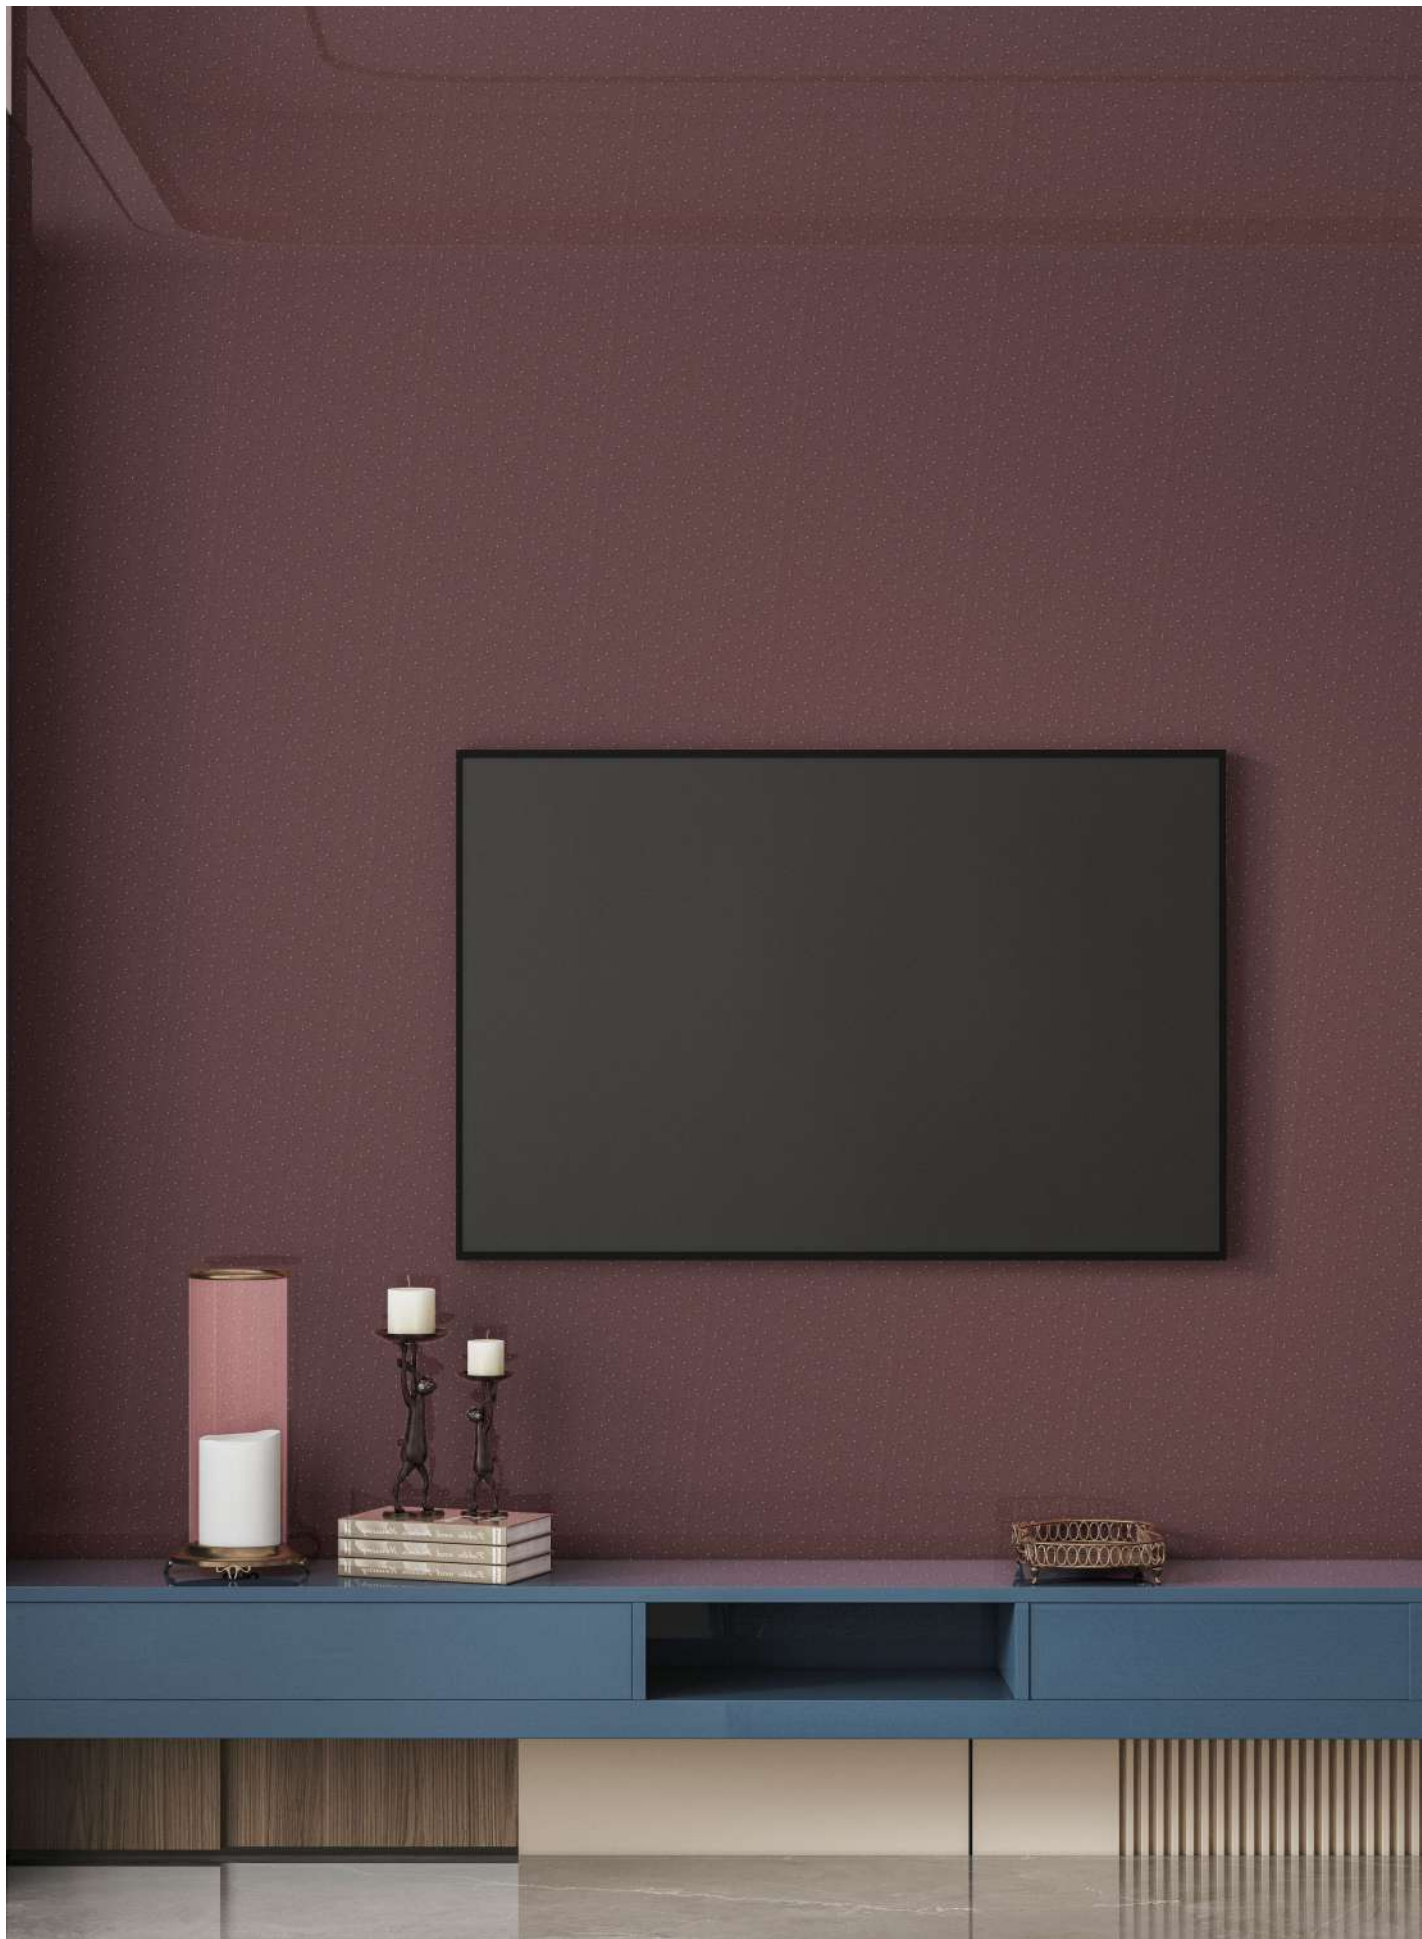


APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL

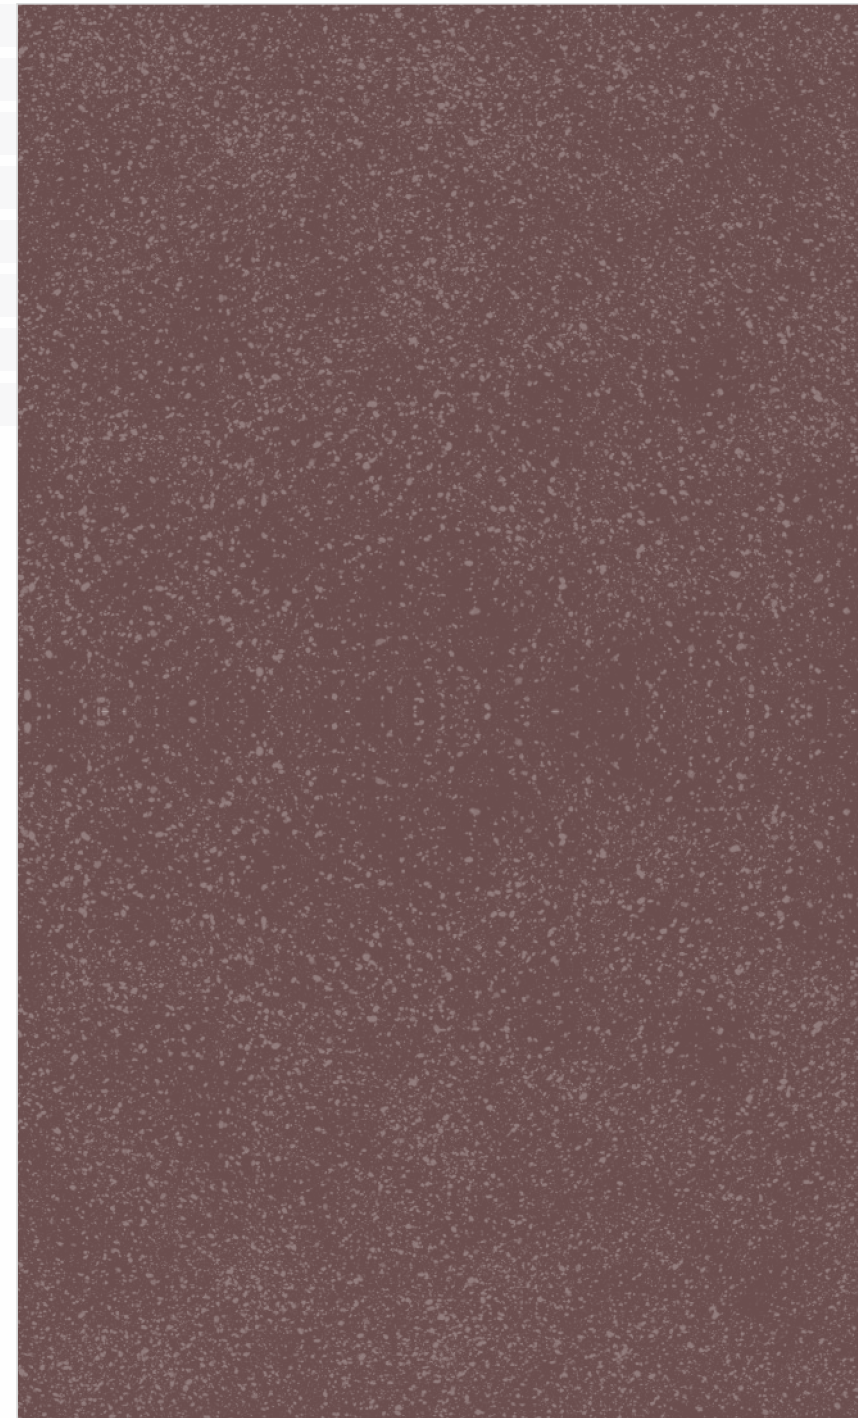

MD-IO52


Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

SPARKLE
Series


6H ANTI SCRATCH
HARDNESS

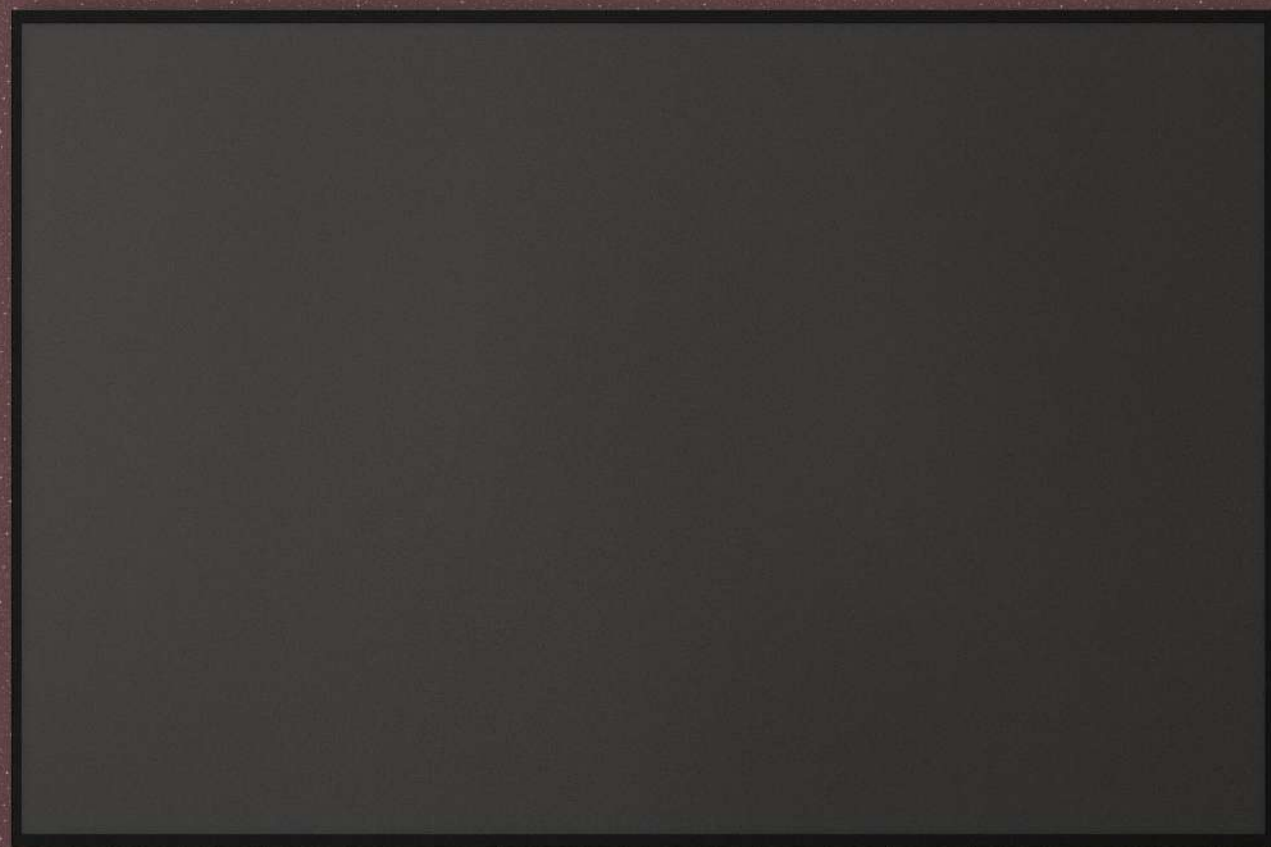

Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

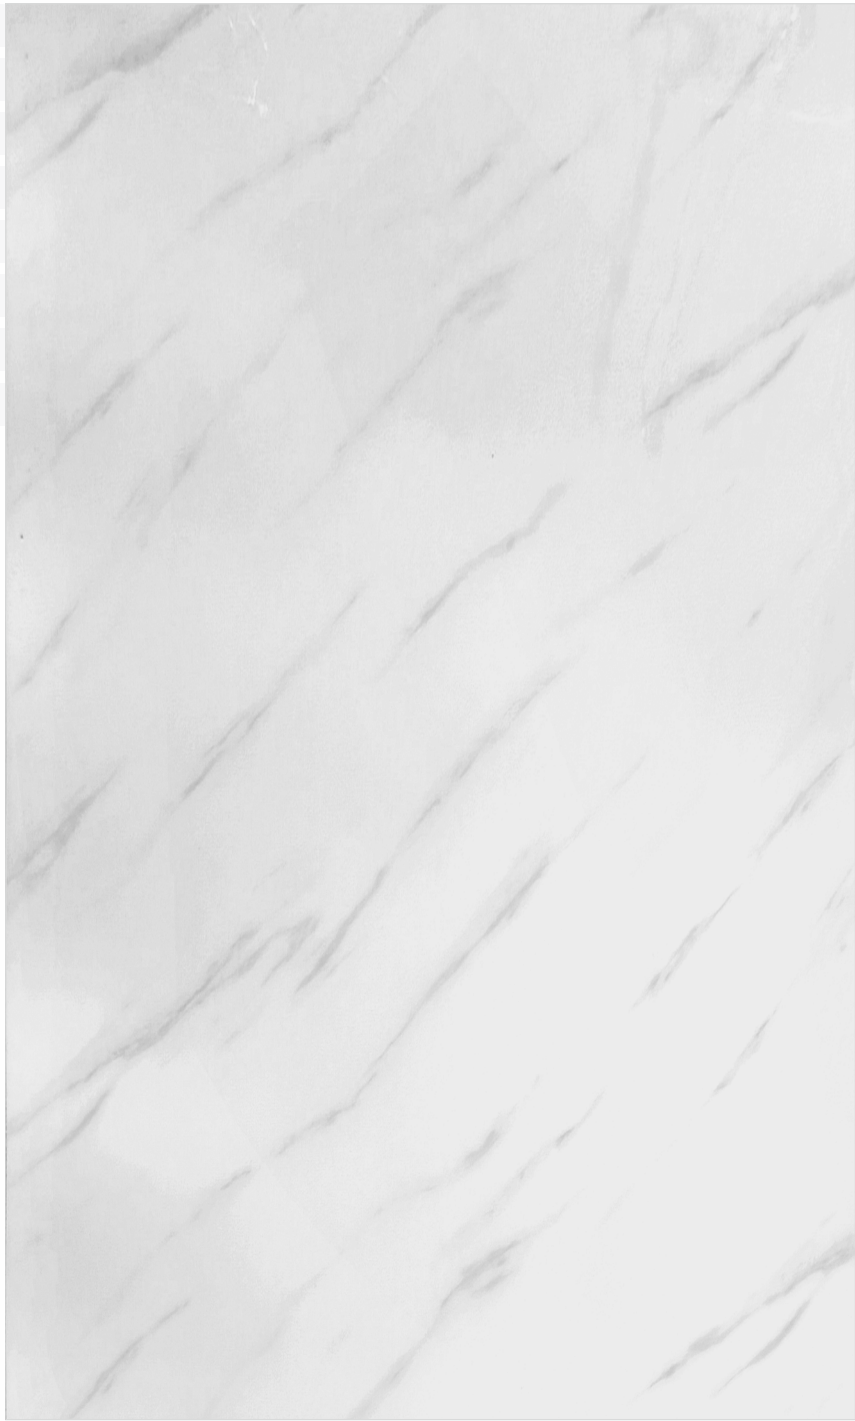

MD-IO40

6H ANTI SCRATCH
HARDNESS

MARBLE
Series



APPLICATION AREAS





YI CHEN

CALATRAVA



ACRYLIC
LAMINATES

LAMITECH
GLOBAL



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IO41

APPLICATION AREAS



MARBLE
Series

6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-IO42

6H ANTI SCRATCH
HARDNESS

MARBLE
Series



APPLICATION AREAS







APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IO58

MARBLE
Series

6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-IO59

6H ANTI SCRATCH
HARDNESS

MARBLE
Series



APPLICATION AREAS







APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL

Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IO53

LUSTER
Marble

6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-IO54

6H ANTI SCRATCH
HARDNESS

IUSTER
Marble



APPLICATION AREAS








APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IO56

LUSTER
Marble

6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM



MD-IO57

6H ANTI SCRATCH
HARDNESS

IUSTER
Marble



APPLICATION AREAS







APPLICATION AREAS



ACRYLIC
LAMINATES

LAMITECH
GLOBAL

Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

MD-IO55

IUSTER
Marble


6H ANTI SCRATCH
HARDNESS



Brilliance
Beyond
Limits.

SIZE :
2440x1220 MM

THICKNESS :
1.5 MM

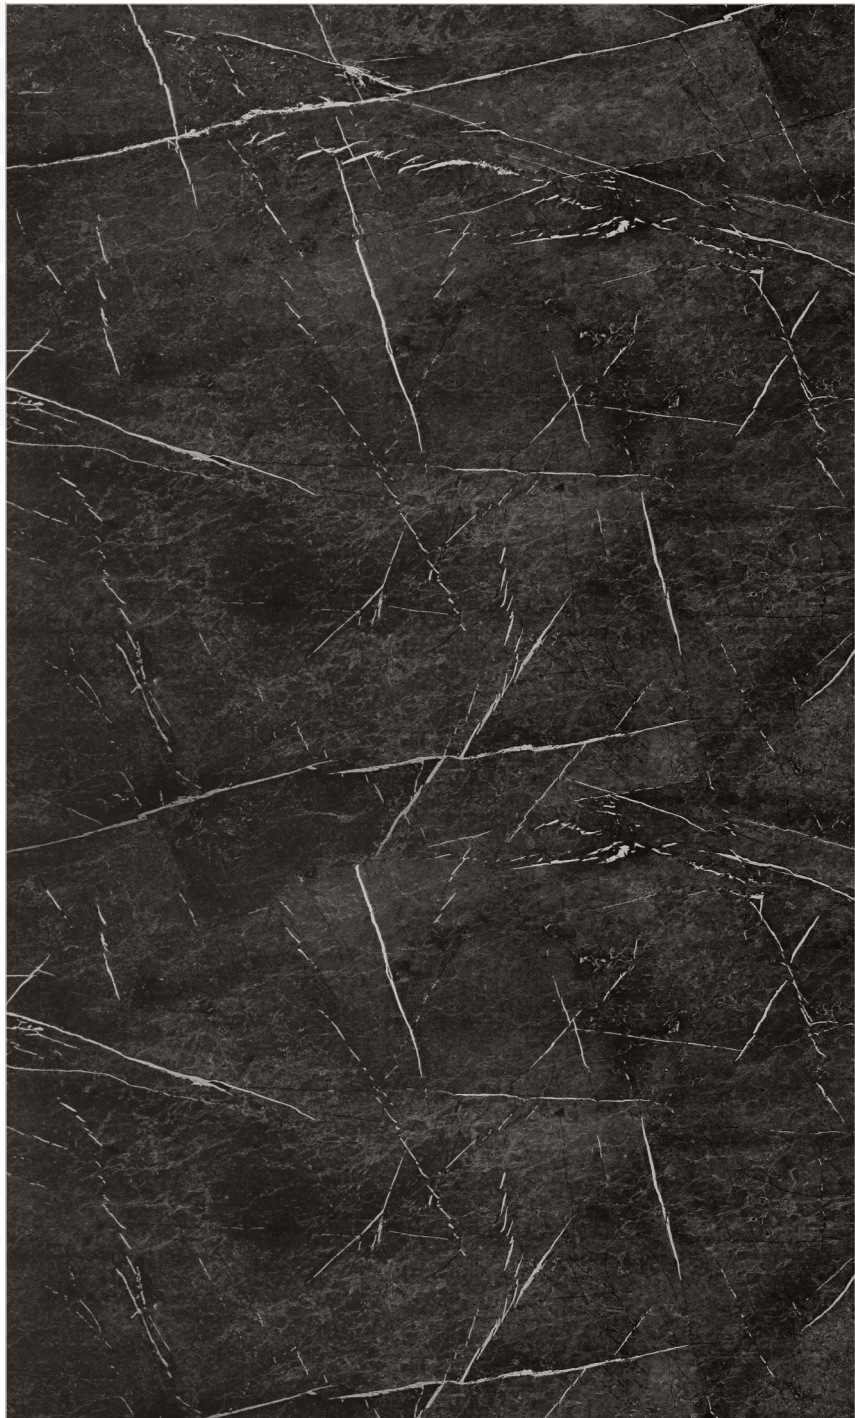

MD-IO60

6H ANTI SCRATCH
HARDNESS

IUSTER
Marble



APPLICATION AREAS





TECHNICAL
SPECIFICATION

Parameter	Acrylic Laminate	High Gloss Laminate Mica	PU Coating/ Duco Paint	Back Painted Glass
Gloss Level	>90	>70	>85	>85
Scratch Proof	6H Anti Scratch	No	No	No
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange Peel	No	Yes	Yes	No
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
Dry Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	No	Yes	Yes	Yes

Causes Of Yellow Patches And
Colour Fading After Installation:



Exposure To Direct Sunlight Can
Gravely Affect A Laminate's Appearance



Use Of Inferior Or Sub-standard Dipped
Plywood Or Dipped Lipping Patti, Which
May Chemically React With The Adhesive



The Use Of Synthetic Rubber Adhesives
Such As Sr / Jat Pat, Bostic, Heatx, Etc.



Prolonged
Exposure To High
Temperature (above 30°C-35°C)



If Hot Cookware Or
Utensils Are Directly Placed
On The Laminate

Reasons For Air Bubble
Formations On Laminates:



Laminates Are Bonded In
Extremely Humid Conditions



Use of water base synthetic resin
adhesive any other than PEVA
(Polyethylene Vinyl Acetate Co-polymer)



When Substrate Loses
Moisture After Installation.



Debonding In Certain Areas Because
Of Uneven Substrate Surface



Use Of Extremely Large Acrylic/pvc
Laminate Sheets (more Than 8 Ft X 2ft Long)



Insufficient Or Lack Of Pressing During
The Bonding Period Of Laminate

Recommended
Adhesive for
Acrylic Laminate



DISCLAIMER

- Do Not Use Plywood With High Moisture Content.
- Do Not Use Ply With Uneven Surface.
- Avoid Using Interior Quality Adhesive.
- Apply Sufficient Pressure.
- We Do Not Recommend Pasting Of Sheets On The Printed/branding Area Of The Plywood.

There Can Be Colour Variation From Different Batches. It Is Advised To Use Same Batch Material To Avoid Colour Variations. Actual Colour Of The Acrylic Sheet May Vary From This Brochure.

LIMITED WARRANTY

Lamitech Global Products Are Tested To Be Reasonably Free of Defects, And When Used And Fabricated Properly They Will Comply With The Applicable Manufacturing Specifications Within Realistic Deviations. We Recommend Customers To Inspect Properly Before Installing. Lamitech Global Warranty In On Way Covers Defects And Non-compliance Or Otherwise Attributable To Any Other Causes, Including Without Limitation The Following :

- Improper Handling / Transportation / Storage.
- There Will Be No Guarantee Or Exchange Under Any Circumstances Improper Installation.
- Color Variations In Products From Different Batches Are Possible.
- Improper Or Unintended Usage.
- We Recommend Using Products From Same Batch To Avoid Color Variations.
- lack Of Or Improper Maintenance.
- This Brochure Is For Presentation Purpose Only.
- Exposure To High Temperatures.
- Unauthorized Alteration To The Products.
- Outdoor Applications.
- Exposure To Direct Sunlight Can Gravely Affect A Laminate's Appearance.
- Use Interior Or Sub-standard Dipped Plywood Or Dipped Lipping Patti,which May Chemically React The Adhesive.
- The Use Of Synthetic Rubber Adhesives Such As Sr / Jat Pat, Bostic, Heatex, Etc.
- Prolonged Exposure To High Temperature (above 30°C-35°C).
- If Hot Cookware Or Utensils Are Directly Placed On The Laminate.
- To Avoid The Inside Cracks & Stretch Line, Do Not Store Acrylic Sheet In Roll From.

HOW TO CARE

- Cleaning Should Be Done With Water And Clean, Non-abrasive Cloth.
- To Remove More Stubborn Stain, Use Mild Household Cleansers Like Colin To Gently Wipe Down With A Non-abrasive Cloth.
- Avoid The Use Of Abrasive Liquid Cleanser's, Bleaching Compounds Or Solutions As These May Damage The Surface Of The Laminate.
- Do Not Place Hot Cookware Directly On The Laminate. Prolonged Exposure To Temperature Above 30 Degrees Celsius May Cause Damage To The Laminate Surface.
- Do Not Use The Laminate For Purposes That It Is Not Intended For (E.g. Do Not Iron Chop, Hammer Or Expose The Laminate To Open Flame)
- Outdoor Application Of The Laminate With Exposure To Direct Sunlight And Conditions Are Not Recommended.
- UV Rays May Be Shaping The Laminate.
- Gloss Surface Are Recommended Only For Vertical Application.
- Peel Off The Protective Film After Processing.
- Have A Thickness Balance Of +/- 0%

The Company Is Not Responsible For Any Kind Of Complains Regarding Damage Of The Furniture For Laminates. The Resins Seen Here Can Have Many Possibilities Like Interior Quality Of Plywood, Any Mistake While Using It. The Company Is Responsible Only Till The Sheet Is Not Used.

LAMITECH

GLOBAL

Email id - lamitechglobal@gmail.com

Website -www.lamitechglobal.com